

1. ElGamal Cryptosystem

1. Public Parameters generation $PP = (p, g)$.

Generate strong prime number p : `>> p=genstrongprime(28)` % strong prime of 28 bit length

Number p is a **strong prime** if $p = 2 \cdot q + 1$, when q is also prime, e.g. $p = 11$, then $p = 2 \cdot 5 + 1$, and 5 is also prime.

Strong prime number p : defines the set $Z_p^* = \{1, 2, 3, \dots, p-1\}$, where multiplication operations **mod** p are defined. Z_p^* is an algebraic group where division operations are defined as well.

Find a generator g in $Z_p^* = \{1, 2, 3, \dots, p-1\}$ using condition:

Strong prime $p = 2q + 1$, where q is prime, then g is a generator of Z_p^* iff

$g^q \neq 1 \pmod p$ and $g^2 \neq 1 \pmod p$.

`>> 2^28-1`

`ans = 2.6844e+08`

`>> int64(2^28-1)`

`ans = 268435455`

Declare **Public Parameters** to the network $PP = (p, g)$; $p = 268435019$; $g = 2$;
 $2^{28}-1 = 268435455$

`>> p=int64(268435019)`

`p = 268435019`

`>> q=(p-1)/2`

`q = 134217509`

`>> g=2`

`g = 2`

`>> mod_exp(g,q,p)`

`ans = 268435018` % `ans /= 1 mod p`

Compatibility relations of modular arithmetic:

$(a + b) \pmod p = (a \pmod p + b \pmod p) \pmod p$. `>> mod(a+b,p)`

$(a * b) \pmod p = ((a \pmod p) * (b \pmod p)) \pmod p$. `>> mod(a*b,p)`

$a^e \pmod p = (a \pmod p)^e \pmod p$. `>> mod_exp(a,e,p)`

Public Parameters $PP = (p, g)$.


Strong prime number p in real cryptography is of order : $p \sim 2^{2048} \sim 10^{700}$.

Strong prime number p in our examples is of order: $p \sim 2^{28}$

`>> p=genstrongprime(28)`



Key generation

- Randomly choose a private key x with $1 < x < p - 1$.
- The private key is $PrK = x = \text{randi}(p-1)$ Compute $a = g^x \pmod p$.
- The public key is $PuK = a = g^x \pmod p$.

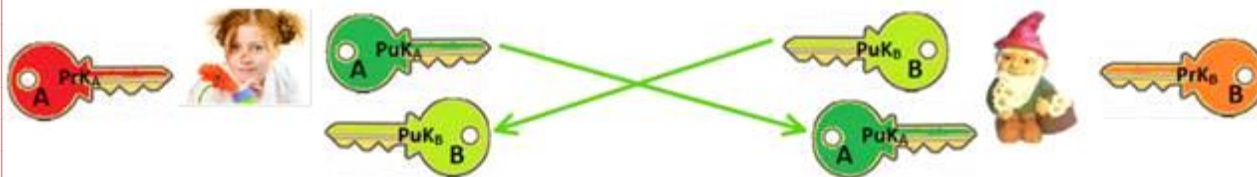

2. El-Gamal Signature scheme

The **ElGamal signature scheme** is a [digital signature](#) scheme which is based on the difficulty of computing [discrete logarithms](#). It was invented by [Taher ElGamal](#) in 1984. The ElGamal signature algorithm is rarely used in practice. A variant developed at [NSA](#) and known as the [Digital Signature Algorithm](#) is much more widely used. The ElGamal signature scheme allows a third-party to confirm the authenticity of a message sent over an insecure channel.

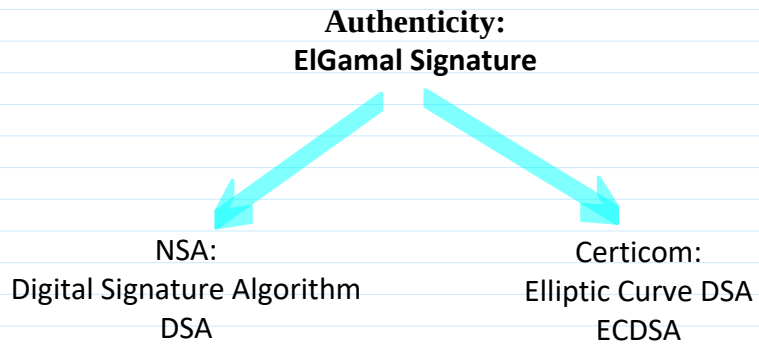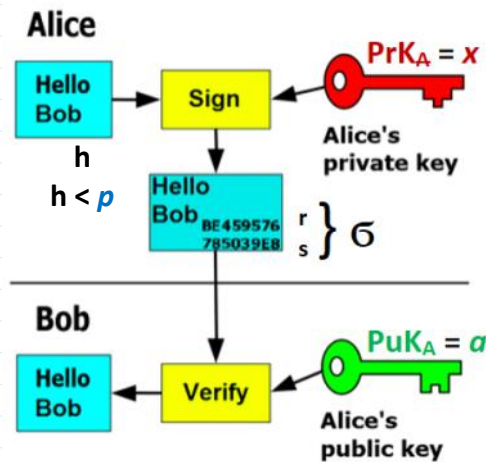

1. Signature creation

To sign any finite message M the signer performs the following steps using public parameters $PP = (p, g)$.

- Compute $h = H(M)$. E.g. SHA-256: $|h| = 256$ bits. If $|p| = 2048$ bits, then evidently $|h| \ll |p|$.
- Choose a random i such that $1 < i < p - 1$ and $\gcd(i, p - 1) = 1$.
- Compute $i^{-1} \bmod (p - 1)$: $i^{-1} \bmod (p - 1)$ exists if $\gcd(i, p - 1) = 1$, i.e. i and $p - 1$ are relatively prime.

i^{-1} can be found using either [Extended Euclidean algorithm](#) or [Euler theorem](#) or

`>> i_m1 = mulinv(i, p-1) % i-1 mod (p-1) computation.`

- Compute $r = g^i \bmod p$
- Compute $s = (h - x \cdot r) \cdot i^{-1} \bmod (p - 1) \rightarrow h = x \cdot r + i \cdot s \bmod (p - 1)$

Signature $\sigma = (r, s)$

$$\left. \begin{aligned} s &= (h - x \cdot r) \cdot i^{-1} / i \\ s \cdot i &= (h - x \cdot r) \cdot \cancel{i^{-1} \cdot i} \\ h - x \cdot r &= s \cdot i \end{aligned} \right\} \bmod p-1 \rightarrow h = x \cdot r + i \cdot s$$

2. Signature Verification

A signature $\sigma = (r, s)$ on a h -value h of message M is verified using Public Parameters $PP = (p, g)$ and $PuK_A = a$.

1. Bob computes $h = H(M)$.
2. Bob verifies if $1 < r < p - 1$ and $1 < s < p - 1$.
3. Bob calculates $V1 = g^h \bmod p$ and $V2 = a^r r^s \bmod p$, and verifies if $V1 = V2$.

The verifier Bob **accepts** a signature if all **conditions** are satisfied during the signature creation and **rejects** it otherwise.

3. Correctness

The algorithm is correct in the sense that a **signature generated with the signing algorithm will always be accepted by the verifier**.

The signature generation implies

$$h = xr + is \bmod (p-1)$$

Hence [Fermat's little theorem](#) implies that all operations in the exponent are computed **mod** (p-1)

$$g^h \bmod p = g^{(xr+is)} \bmod (p-1) \bmod p = g^{xr} g^{is} = (g^x)^r (g^i)^s = a^{r^s} \bmod p$$

$$\text{V1} \qquad (a)^r (r)^s = \text{V2}$$

```
>> p= int64(268435019)    >> i=int64(randi(p-1))    >> r=mod_exp(g,i,p)        >> g_h=mod_exp(g,h,p)
p = 268435019             i = 201156232                r = 172536234            g_h = 241198023
>> g=2;                  >> gcd(i,p-1)              >> hmxr=mod(h-x*r,p-1)    >> V1=g_h
>> x=int64(randi(p-1))    ans = 2              hmxr = 20262153        V1 = 241198023
x = 65770603              >> i=int64(randi(p-1))    >> s=mod(hmxr*i_m1,p-1)  >> a_r=mod_exp(a,r,p)
>> a=mod_exp(g,x,p)       i = 35395315         s = 44575091          a_r = 49998673
a = 232311991             >> gcd(i,p-1)          >> r_s=mod_exp(r,s,p)    >> r_s = 111993804
>> M='Hello Bob...'      ans = 1              >> V2=mod(a_r*r_s,p)    V2 = 241198023
M = Hello Bob...          >> i_m1=mulinv(i,p-1)  >> V2=mod(a_r*r_s,p)
>> h=hd28(M)              i_m1 = 192754179
h = 150954921             >> mod(i*i_m1,p-1)
ans = 1
```

1-st Part: Elliptic Curve Cryptography - ECC

Elliptic-curve cryptography (ECC) is an approach to [public-key cryptography](#) based on the [algebraic structure](#) of [elliptic curves](#) over [finite fields](#).

δ

ECC requires smaller keys compared to non-ECC cryptography to provide equivalent security. For example, to achieve the same security ensured by ECC having private key of 256 bit length, it is required to use over 3000 bit private key length for RSA cryptosystem and others.

Elliptic curves are applicable for [key agreement](#), [digital signatures](#), [pseudo-random generators](#) and other tasks.

Indirectly, they can be used for [encryption](#) by combining the key agreement with a symmetric encryption scheme.

[Elliptic Curve Digital Signature Algorithm - Bitcoin Wiki](#) (ECDSA)

https://en.bitcoin.it/wiki/Elliptic_Curve_Digital_Signature_Algorithm Feb 10, 2015

Elliptic Curve Digital Signature Algorithm or **ECDSA** is a cryptographic algorithm used by Bitcoin, Ethereum and other blockchain methods to ensure that funds can only be spent by their owner.

https://en.wikipedia.org/wiki/Elliptic-curve_cryptography

Finite Field denoted by F_p (or rarely Z_p), when: p is prime.

$F_p = \{0, 1, 2, 3, \dots, p-1\}$; $+$ mod p , $-$ mod p , $\bullet$ mod p , $\div$ mod p , except division by 0.

Cyclic Group: $Z_p^* = \{1, 2, 3, \dots, p-1\}$; $\bullet$ mod p , $\div$ mod p .

For example, if $p=11$, then one of the generators is $g=2$.

$p=11$

$xa \in$

The main function used in cryptography was Discrete Exponent Function - DEF:
DEF(x) = $g^x \bmod p = a$, e.g. when $p = 11$.

x	0	1	2	3	4	5	6	7	8	9	10
$2^x \bmod p$	1	2	4	8	5	10	9	7	3	6	1

Discrete Exponent Function - $\text{DEF}_g(x) = g^x \bmod p$

x is in $Z_{p-1} = Z_{10} = \{0, 1, 2, \dots, 9\}$;

$\text{DEF}(x)$ is in $Z_p^* = Z_{11}^* = \{1, 2, 3, \dots, 10\}$;

DEF: $Z_{p-1} \rightarrow Z_p^*$.

Fermat theorem: if p is prime, then for any z : $z^{p-1} = 1 \bmod p$.

If g is a generator in Z_p^* then DEF is 1-to-1 mapping.

$x \in Z_{10}$

$a \in Z_{11}^*$

0				1
1				2
2				4
3				8
4				5
5				10
6				9
7				7
8				3
9				6

Multiplicative Group Z_p^*	Additive Group Z_{p-1}^+
$Z_p^* = \{1, 2, 3, \dots, p-1\}$	$Z_{p-1}^+ = \{0, 1, 2, 3, \dots, p-2\}$
Operation: multiplication mod p	Operation: addition mod $(p-1)$
Neutral element is 1.	Neutral element is 0.
Generator g : $Z_p^* = \{g^i; i=0,1,2, \dots, p-2\}$	Generator g : $Z_{p-1}^+ = \{i \cdot g; i=0,1,2, \dots, p-2\}$
Two criterions to find g when p is strong prime.	E.g. $g=1$.
$g^n \neq 1 \bmod p$ if $n < p$.	$(p-1) \cdot g = 0 \bmod (p-1)$ and
Modular exponent: $t = g^k \bmod p$	$n \cdot g \neq 0 \bmod (p-1)$ if $0 < n < p-2$.
$t = g \cdot g \cdot g \cdot \dots \cdot g \bmod p$; k -times.	Modular multiplication: $t = k \cdot g \bmod p-1$
	$t = g + g + g + \dots + g \bmod p-1$; k -times.

$p = 11, p-1 = 10$

$\cdot \bmod p$

$Z_{11}^* = \{1, 2, \dots, 10\}$

$|Z_{11}^*| = 10, g=2$.


$p = 11, p-1 = 10$

$+ \bmod (p-1)$


$Z_{10}^+ = \{0, 1, 2, \dots, 9\}$

$|Z_{10}^+| = 10; g=1$.


x		$2^x \bmod 11$
0	$\rightarrow$	1
1	$\rightarrow$	2
2	$\rightarrow$	4
3	$\rightarrow$	8
4	$\rightarrow$	5
5	$\rightarrow$	10
6	$\rightarrow$	9
7	$\rightarrow$	7
8	$\rightarrow$	3
9	$\rightarrow$	6
10	$\rightarrow$	1

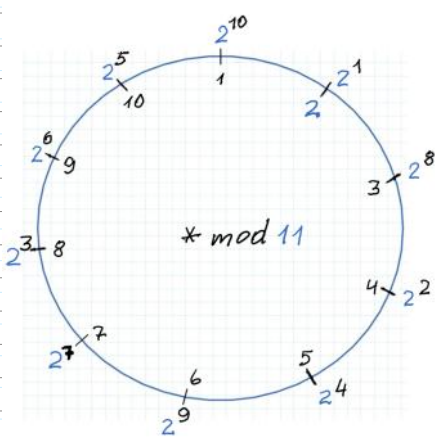

x		$x \cdot 1 \bmod 10$
0	$\rightarrow$	1
1	$\rightarrow$	2
2	$\rightarrow$	3
3	$\rightarrow$	4
4	$\rightarrow$	5
5	$\rightarrow$	6
6	$\rightarrow$	7
7	$\rightarrow$	8
8	$\rightarrow$	9
9	$\rightarrow$	0
10	$\rightarrow$	1

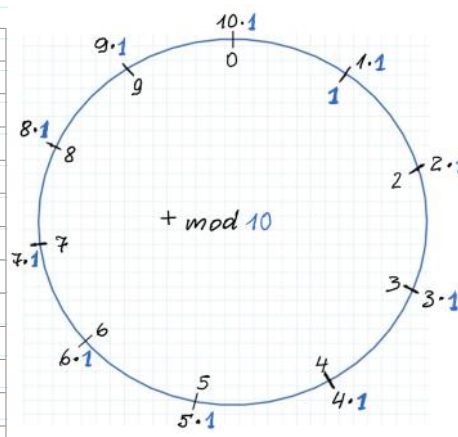

Coordinate systems XOY in subsequent examples are defined in the plane of real numbers.

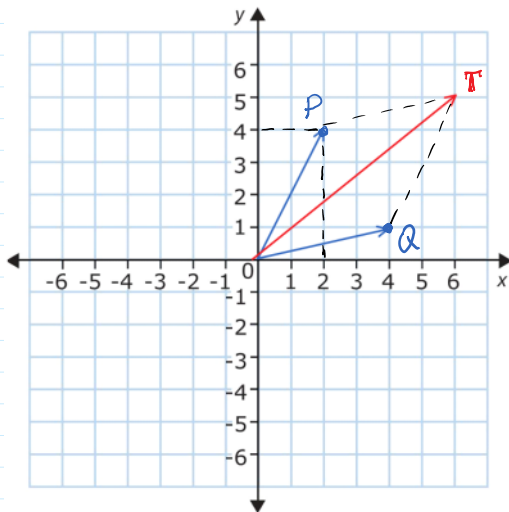


$$\begin{aligned} P(x_p, y_p) &= (2, 4) \\ Q(x_q, y_q) &= (4, 1) \end{aligned} \quad \left. \begin{aligned} P+Q &= (2+4, 4+1) \\ T &= P+Q = (6, 5) \end{aligned} \right\}$$

$$\begin{aligned} T &= P(x_p, y_p) \oplus Q(x_q, y_q) = \\ &= T(x_p + x_q, y_p + y_q) = T(x_T, y_T) \end{aligned}$$






$$\begin{aligned} x_T &= x_p + x_q \\ y_T &= y_p + y_q \end{aligned} \quad \left. \begin{aligned} x_T &= x_p + x_q \\ y_T &= y_p + y_q \end{aligned} \right\}$$

$$T_2 = P + P = 2P =$$


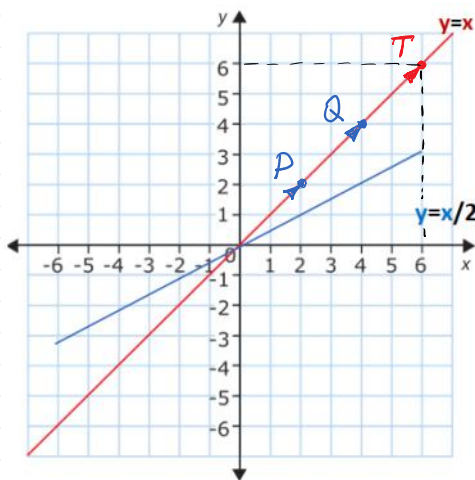


$$\begin{aligned} x_T &= 2 + 4 = 6 \\ y_T &= 2 + 4 = 6 \end{aligned}$$

$$\begin{aligned} |T| &= \\ &= \sqrt{6^2 + 6^2} \end{aligned}$$

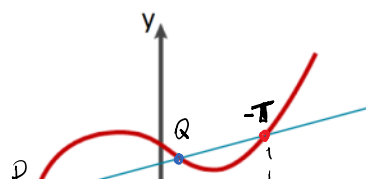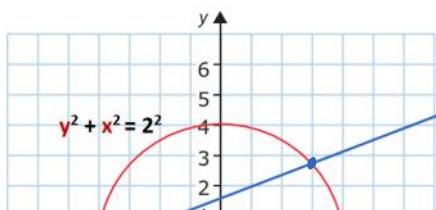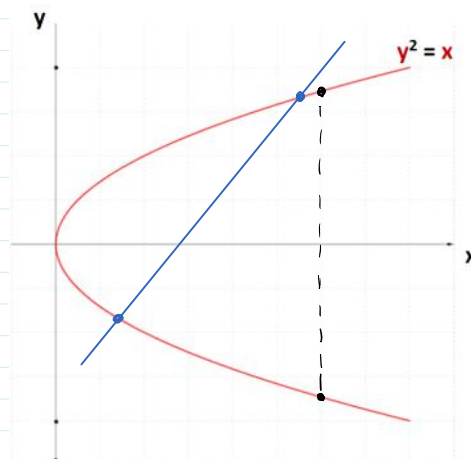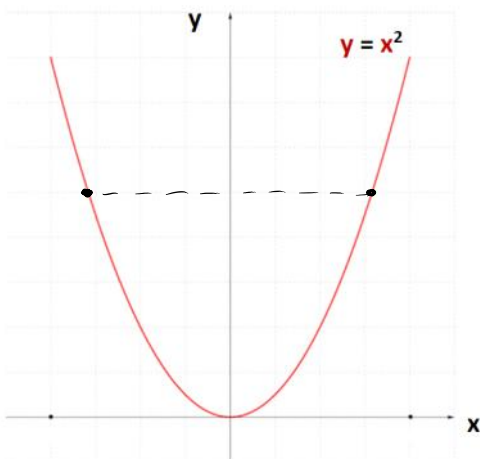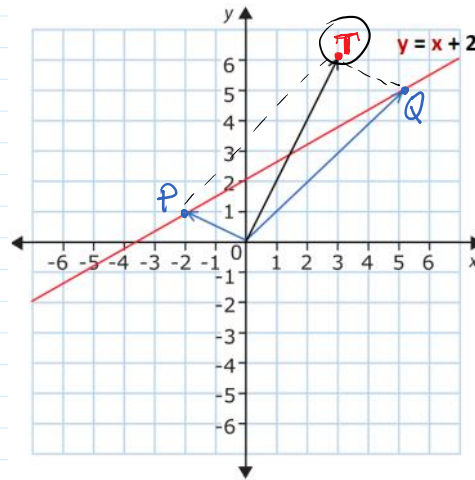

$y^2 = x^3 + ax + b$
Operations are performed in field F_p

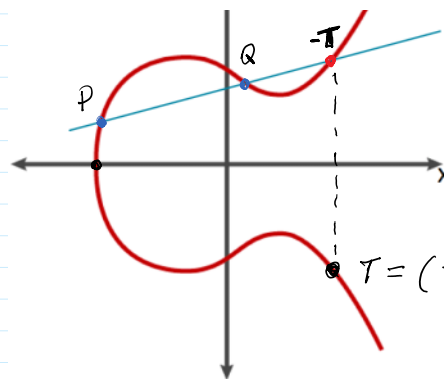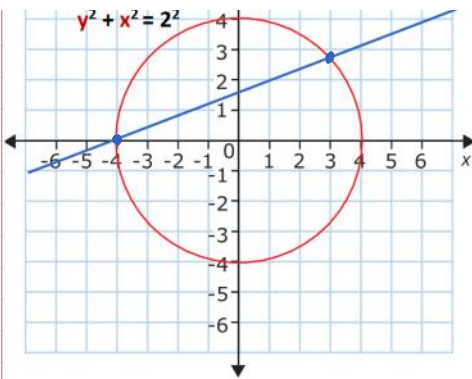

Operations are performed in field F_p

$$P \boxplus Q = T \in EC$$

$$T \boxplus (-T) = O$$

$$\infty = \frac{y}{x_2 - x_1}$$



Elliptic curve has a property that if a line crosses two points, then there is a third crossing point in the curve.

Points in the plane or plane curve we denote by the capital letters, e.g. A, G, P, Q, etc.

Numbers-scalars we denote by the lowercase letters, e.g., a, g, x, y, z, etc.

Addition of points P and Q in EC: $P \boxplus Q = T$

$$P(x_P, y_P) + Q(x_Q, y_Q) = T(x_T, y_T)$$

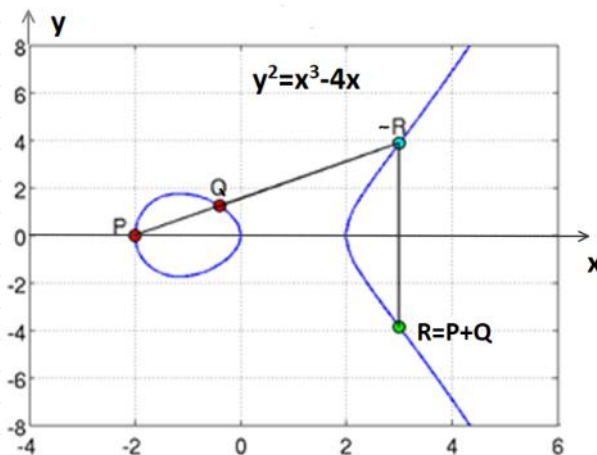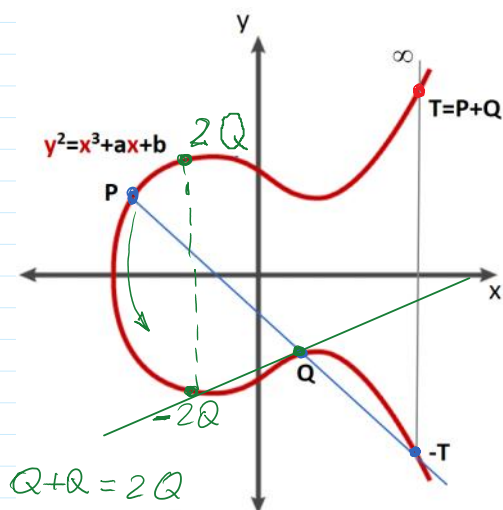

$$5 - 5 \bmod 10 = 0 \quad T - T = "0" \rightarrow T + (-T) = "0" \equiv \infty$$



$$7 + 0 \bmod 10 = 7$$



$$T + \infty = T$$

When z is large, $z \sim 2^{256} \rightarrow |z| = 256 \text{ bits}$:

Doubling of points allows effectively compute point $A = zG$
 $a = g^x \bmod p$

$$G + G = 2G \quad y \quad 8G = 2^3 G$$

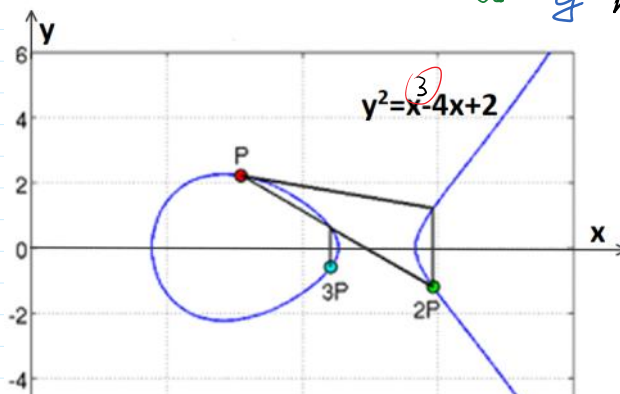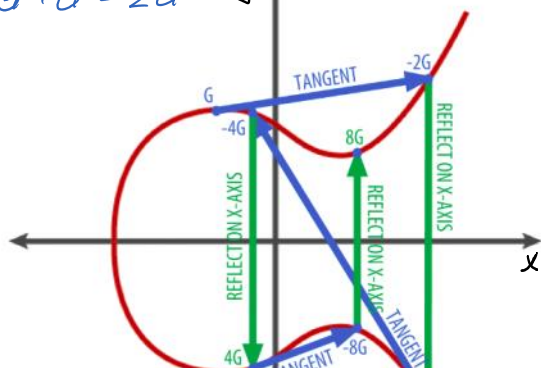

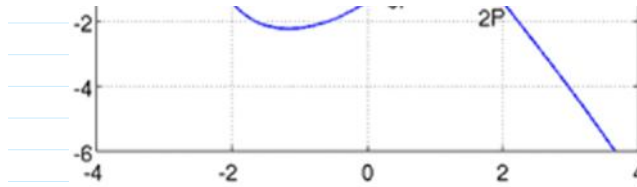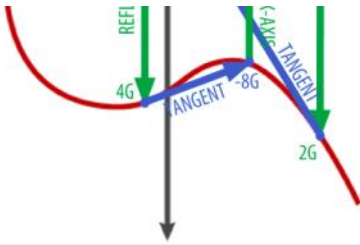

ECDSA animacija

[Signing and Verifying Ethereum Signatures – Yos Riady · Software Craftsman](#)

<https://medium.com/coinmonks/elliptic-curve-cryptography-6de8fc748b8b>

For current cryptographic purposes, an *elliptic curve* is a [plane curve](#) over a finite field $F_p = \{0, 1, 2, 3, \dots, p-1\}$, (rather than the real numbers) p -is prime.

Which consists of the points satisfying the equation over F_p

$$y^2 = x^3 + ax + b \pmod{p}$$

along with a distinguished [point at infinity](#), denoted by O (∞).

Finite field is an algebraic structure, where 4 algebraic operations: $+\pmod{p}$, $-\pmod{p}$, $\cdot\pmod{p}$, $:\pmod{p}$ are defined except the division by 0 excluded.

Elliptic Curve Group (ECG)

Number of points N of Elliptic Curve with coordinates (x, y) is an order of ECG.

Addition operation $\boxplus$ of points in ECG: let points $P(x_P, y_P)$ and $Q(x_Q, y_Q)$ are in EC with coordinates (x_P, y_P) and (x_Q, y_Q) then $P \boxplus Q = T$ with coordinates (x_T, y_T) in EC.

Neutral element is group zero O at the infinity (∞) of $[XOY]$ plane.

Multiplication of any EC point G by scalar z : $T = z * G$; $T = G \boxplus G \boxplus \dots \boxplus G$; z -times.

Generator–Base Point G : $ECG = \{i * G; i = 1, 2, \dots, N\}$; $N * G = O$ and $q * G \neq O$ if $q < N$.

Because this curve is defined over a finite field of prime order instead of over the real numbers, it looks like a pattern of dots scattered in two dimensions, which makes it difficult to visualize. However, the math is identical to that of an elliptic curve over real numbers. As an example, [Elliptic curve cryptography: visualizing an elliptic curve over \$F\(p\)\$](#) , with $p=17$ shows the same elliptic curve over a much smaller finite field of prime order 17, showing a pattern of dots on a grid. The [secp256k1 bitcoin elliptic curve](#) can be thought of as a much more complex pattern of dots on a unfathomably large grid.

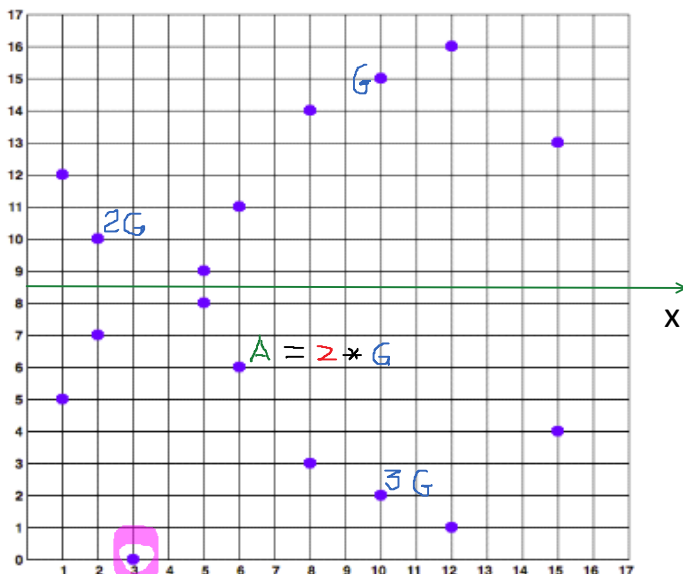


Figure 3. Elliptic curve cryptography: visualizing an elliptic curve over $F(p)$, with $p=17$

$$F_p = \{0, 1, 2, 3, \dots, p-1\};$$

$$p=17;$$

$$F_{17} = \{0, 1, 2, 3, \dots, 16\};$$

ElGamal Cryptosystem (CS)	Elliptic Curve Cryptosystem (CS)
PP =(strongprime p , generator g); p =255996887; g =22;	PP =(EC secp256k1 ; BasePoint-Generator G ; prime p ; param. a , b); Parameters a , b defines EC equation $y^2=x^3+ax+b \bmod p$ over F_p .
PrK = x ; >> x =randi(p -1).	PrK_{ECC} = z ; >> z =randi(p -1).
PuK = a = g^x mod p .	PuK_{ECC} = A = z * G .
Alice A : x =1975596; a =210649132;	Alice A : z =.....; A =(x_A , y_A);

Notations:

By lowercase letters $x, y, \dots, z$ are denoted integers

By capital letters $G, P, Q, R, \dots, T$ are denoted EC points

Operation	Meaning
+	Addition operation for integers
•	Multiplication operation for integers
$\boxplus$	Addition operation for EC points
*	Multiplication operation for integers multiplication of EC points: $T=z*G$; $T=G \boxplus G \boxplus G \boxplus \dots \boxplus G$; z -times.

Main identities:

Let $x*P = Q$, $y*P = R$ and $Q \boxplus R = T$, then

$(x + y)*P = x*P \boxplus y*P = Q \boxplus R = T$.

The last identity is used when $P = G$ and G is a generator.