Poster Report (PR) presentation will be contactly in 210 class during the last lecture.
For Eser Kara PR presentation will be during the final lecture in the different place and at the differen time .

Cryptography: information

confidentiality, integrity, authenticity, person identification

Symmetric cryptography ---------- **Asymmetric cryptography** 1976

Symmetric encryption:
block ciphers
stream ciphers
H-functions, Message digest
HMAC H-Message Authentication Code


Asymmetric encryption
E-signature - Public Key Infrastructure - PKI
Blockchain
E-money
E-voting
Digital Rights Management - DRM (Marlin)
Etc.


Symmetric encryption

Asymmetric encryption: allows to encrypt restricted length of message |m|<2048 bits
|m| < |***p***|; |***p***|<2048 bits.
What to do if we want to encrypt a big messages consisting of Kbytes, Mbytes, Gbytes, … .
The solution is to use Symmetric encryption.

Diffie-Hellman Key Agreement Protocol (DH KAP)

Public Parameters PP=(*p*, *g*)

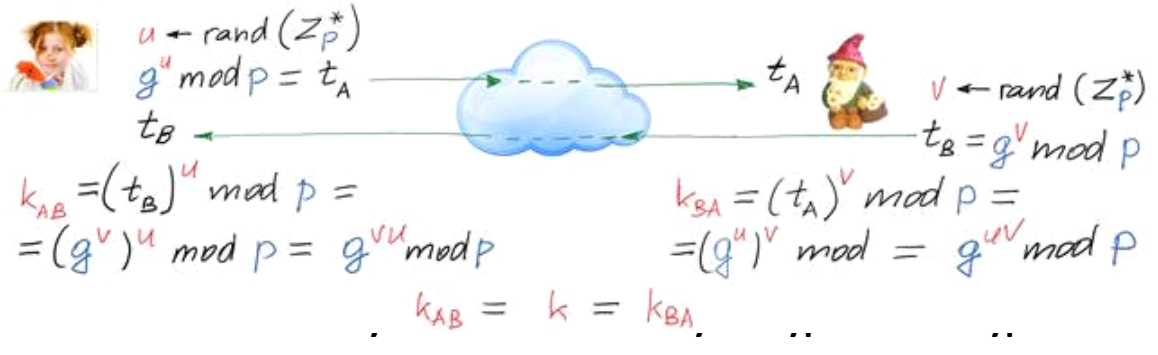

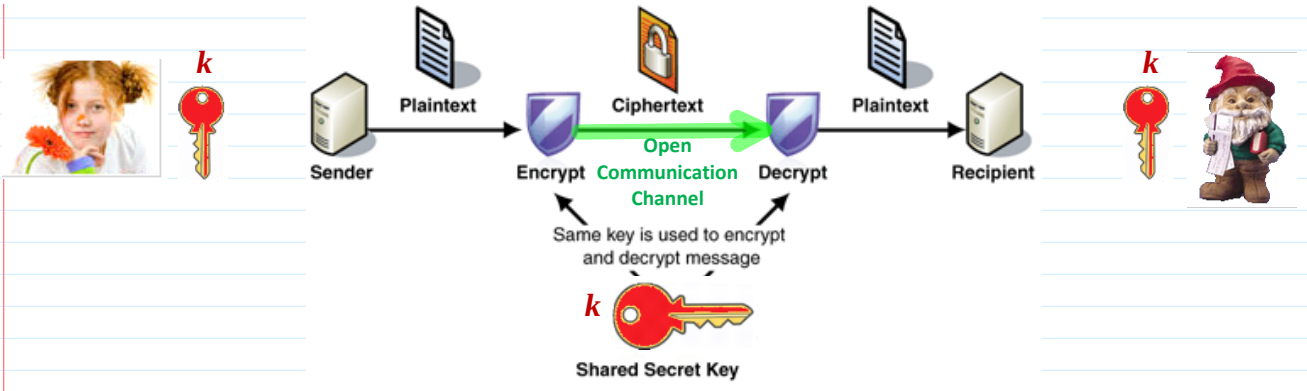

Imagine that number of users of cryptosystem is 100.


$$C_{100}^{2} = \frac{100*99}{2} = 4950$$

Symmetric ciphers

AES: **Block Ciphers**


128, 192, 256

Stream Ciphers

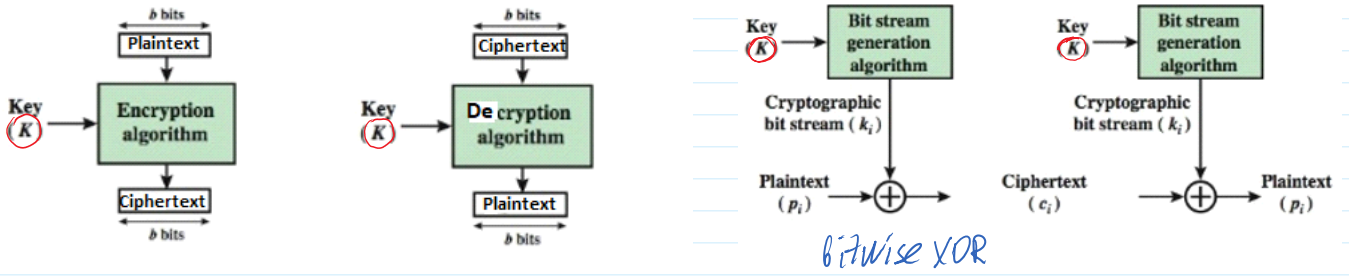


bitwise XOR

Dart game (simplified) for Boolean variable explanation:
If Arrow hits an area otside *A* the outcome is 0: *A*=0.
If Arrow hits an area *A* the outcome is 1: *A*=1.
Hence the outcome is represented by 1 bit of information, i.e. by 1 Boolean variable *A*.

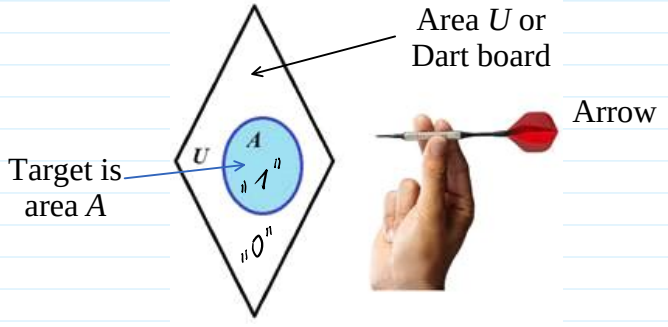

Logical operations

$A \cup B$ $A \cap B$ $A \oplus B$

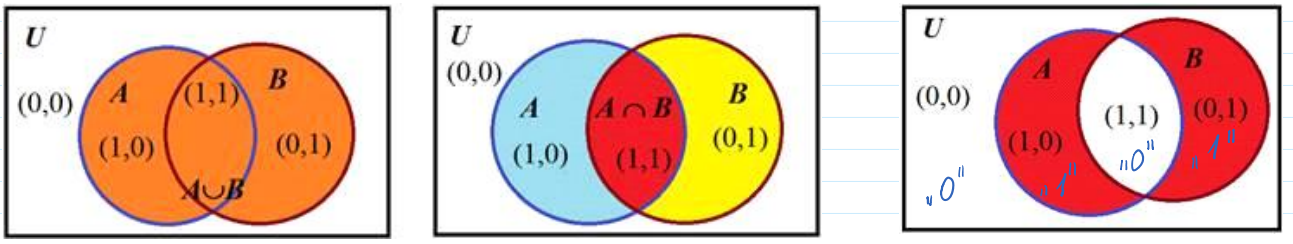

Vernam cipher (1917) - One Time Pad

"0" No

"1" Yes

$m \in \{0,1\}$

$k \leftarrow rand\{0,1\}$; $k \in \{0,1\}$

$c = m \oplus k$ — c →

If $Pr(k=0) = Pr(k=1) = 1/2$

Then $Pr(c=0) = Pr(c=1) = 1/2$

$Pr(m=0) = Pr(m=1) = 1/2$

Balanced function

A	B	A⊕B
0	0	0
0	1	1
1	0	1
1	1	0

m	k	m⊕k=c
0	0	0
0	1	1
1	0	1
1	1	0

⊕ - is inverse to itself


B: $c = m \oplus k - k = m$

$c \oplus k = m \oplus k \oplus k =$


$= m \oplus 0 = m = 1$

$c \oplus k = m$


Stream Cipher - Vernam Cipher - One-Time Pad

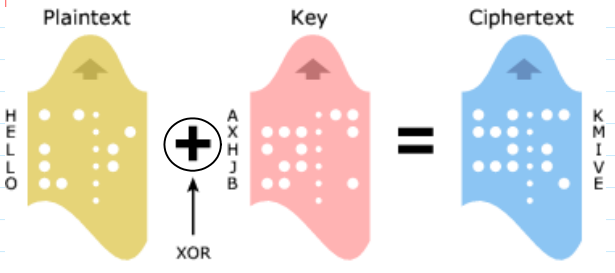

bitwise

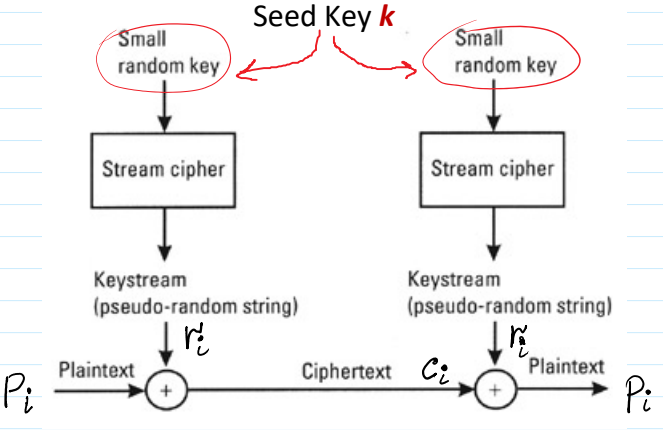

2^{64}

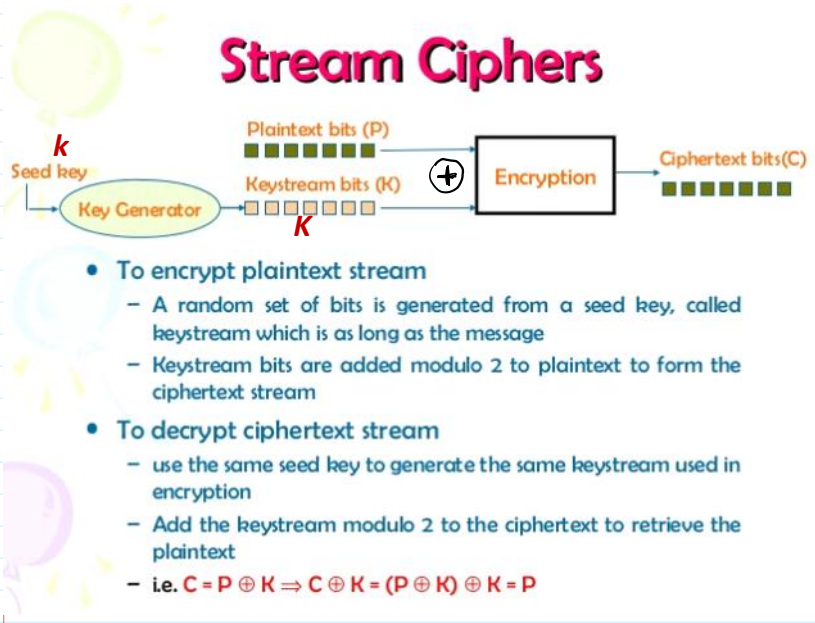

Pseudo Random Numbers Generators - PRNG: FIPS-142-2

$r_{i+1} = PRNG(r_i)$

$r_1 = PRNG(r_0)$; r_0 – initial value: $r_0 = k \| salt$

Non-secret

$r_2 = PRNG(r_1)$

$r_n = PRNG(r_{n-1})$

Vernam cipher: Plaintext ***M*** --> Encryption $E_k(M)=C$ --> Ciphertext ***C***.

For general encryption and decryption bitwise XOR operation $\oplus$ is used for bitstrings.
Bit string ***K*** is generated from Seed Key ***k*.**
Plaintext ***M*** and key ***K*** (bit stream equal *to* ***m*** bit stream) are transformed to binary form consisting of bitstrings.
Encryption: $C = M \oplus K$.
Decryption: $M = C \oplus K = M \oplus K \oplus K = M \oplus 0 = M$.

Security requirements.
1.Bit string key ***K*** must be generated **at random** using *Pseudo* Random Number Generators - PRNG.
2.Bit string key ***K*** bit length must be no less than plaintext bit length: $|K| >= |M|$.
3.Bit string key ***K*** can be used only once.

Active adversary, Eavesdropping adversary.

Attention! If the same generated key stream ***K*** is used twice in Vernam cipher for any two messages M_1 and M_2 encryption, then ***eavesdropping*** adversary can obtain data D_b which is equal to bitwise XOR between M_1 and M_2. Let ciphertexts C_1 and C_2 are obtained by the following encryption with the same generated key stream ***K***

$C_1 = M_1 \oplus K$,
$C_2 = M_2 \oplus K$,
where $\oplus$ is bitwise XOR operation.

Then eavesdropping adversary computes the following data d_b

$D_b = C_1 \oplus C_2 = M_1 \oplus K \oplus M_2 \oplus K = M_1 \oplus M_2 \oplus K \oplus K = M_1 \oplus M_2 \oplus 0 = M_1 \oplus M_2$.

It is reckoned as a ***crucial insecurity*** since cryptanalysis of data D_b is significantly facilitated and both M_1 and M_2 can be disclosed.

Moreover, if any message of two M_1 or M_2 are revealed by some circumstances, say message M_2, then the other message M_1 becomes clear to the adversary by computing

$$D_b \oplus M_2 = M_1 \oplus M_2 \oplus M_2 = M_1 \oplus 0 = M_1.$$

Never use the same generated key stream ***K*** twice in Vernam cipher!

The same secret key ***k*** can be used multiple times in standardized block ciphers (AES) and stream ciphers.

```
>> kAB = int64(195681379)
kAB = 195681379
>> k=kAB
k = 195681379
>> kb=dec2bin(k)
kb = 101 1101 0100  1 1101 1100 0110 0011

>> m1=120000
m1 = 120000
>> m1b=dec2bin(m1)
m1b = 1 1101 0100 1100 0000
>> m2=9
m2 = 9
>> m2b=dec2bin(m2)
m2b = 1001
```

```
>> c1b=binaryxor(m1b,kb)
c1b = 101 1101 0100 0 0000 1000 1010 0011
>> c2b=binaryxor(m2b,kb)
c2b = 101 1101 0100 1 1101 1100 0110 1010
 >> c12b=binaryxor(c1b,c2b)
c12b =  (Db)        1 1101 1101 0100 1100

1001

Assume that Adversary spies found out
            m2 and hence m2b
>> mm1b=binaryxor(c12b,m2b)
mm1b = 1 1101 0100 1100 0000
>> mm1=bin2dec(mm1b)
mm1 = 120000
Then adversary detected the other secret
            sum m1 = 120000
```

```
10111010100 0 0000 1000 1010 0011
⊕
10111010100 1 1101 1100 0110 1010


00000000000 1 1101 0100 1100 1001
```

Block cipher: Advanced Encryption standard **AES** - 128, 192, 256 --> Encryption --> Decryption

Advanced Encryption Standard ~ 2000

Key length 128, 192, 256 bits: $|k| \in \{128b, 192b, 256b\}$

Data to be encripted : message M



The length of any block Bi should be $|B_i| = 128$ bits
192 bits
256 bits

$|B_i| = |k| = 128$ bits


Block Cipher: Electronic Code Book -**ECB** mode of encryption

From <https://binaryterms.com/block-cipher.html>


1. Electronic Code Book (ECB) mode in AES-128

This is considered to be the easiest block cipher mode of operation. In electronic codebook mode (ECB) the plain text is divided into the blocks, each of 128-bit. Each block is encrypted one at a time to produce the cipher block. The same key is used to encrypt each block.

When the receiver receives the message i.e. ciphertext. This ciphertext is again divided into blocks, each of 128-bit and each block is decrypted independently one at a time to obtain the corresponding plain text block. Here also the same key is used to decrypt each block which was used to encrypt each block.

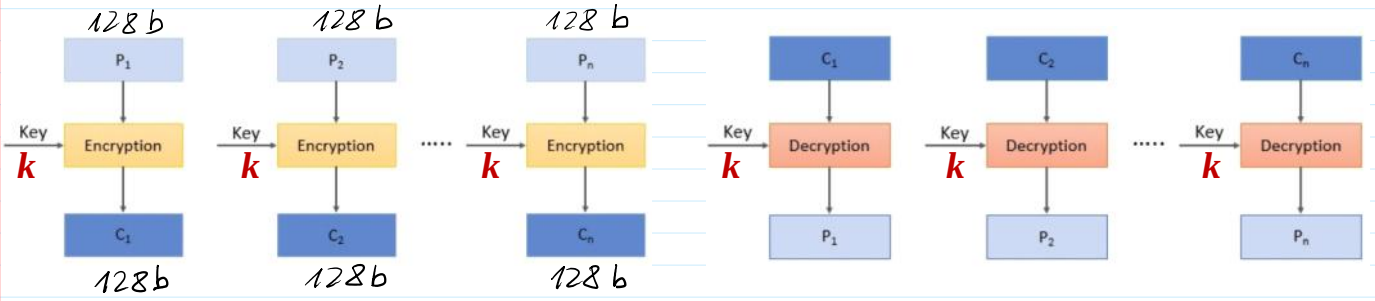

$$AES(k, P_1) = C_1$$
$$AES(k, P_2) = C_2$$
$$AES(k, P_n) = C_n$$

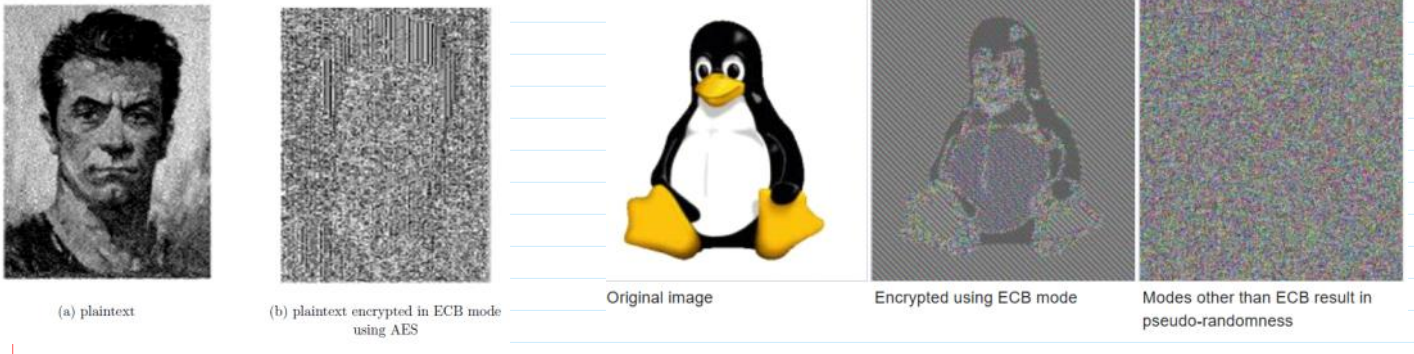

(a) plaintext

(b) plaintext encrypted in ECB mode using AES

Original image

Encrypted using ECB mode

Modes other than ECB result in pseudo-randomness

https://binaryterms.com/block-cipher.html

2. Cipher Block Chaining - CBC Mode

To overcome the limitation of ECB i.e. the repeating block in plain text produces the same ciphertext, a new technique was required which is Cipher Block Chaining (CBC) Mode. CBC confirms that even if the plain text has repeating blocks its encryption won't produce same cipher block.

To achieve totally different cipher blocks for two same plain text blocks **chaining** has been added to the block cipher. For this, the result obtained from the encryption of the first plain text block is fed to the encryption of the next plaintext box.

In this way, each ciphertext block obtained is dependent on its corresponding current plain text block input and all the previous plain text blocks. But during the encryption of first plain text block, no previous plain text block is available so a random block of text is generated called **Initialization vector**.

Now let's discuss the encryption steps of CBC

Step 1: The initialization vector and first plain text block are XORed and the result of XOR is then encrypted using the key to obtain the first ciphertext block.

Step 2: The first ciphertext block is fed to the encryption of the second plain text block. For the encryption of second plain text block, first ciphertext block and second plain text block is XORed and the result of XOR is encrypted using the same key in step 1 to obtain the second ciphertext block.

Similarly, the result of encryption of second plain text block i.e. the second ciphertext block is fed to the encryption of third plain text block to obtain third ciphertext block. And the process continues to obtain all the ciphertext blocks.

Decryption Steps:

Step 1: The initialization vector is placed in the shift register. It is encrypted using the same key.

Keep a note that even in the **decryption process** the **encryption** algorithm is implemented instead of the decryption algorithm.


Then from the encrypted IV s bits are XORed with the s bits ciphertext C1 to retrieve s bits plain text P1.

Step 2: The IV in the shift register is left-shifted by s bits and the s bits C1 replaces the rightmost s bits of IV.

The process continues until all plain text fragments are retrieved.

$IV \oplus k = C_{10}$

CBC	
Cipher block chaining	
Encryption parallelizable:	No
Decryption parallelizable:	Yes
Random read access:	Yes

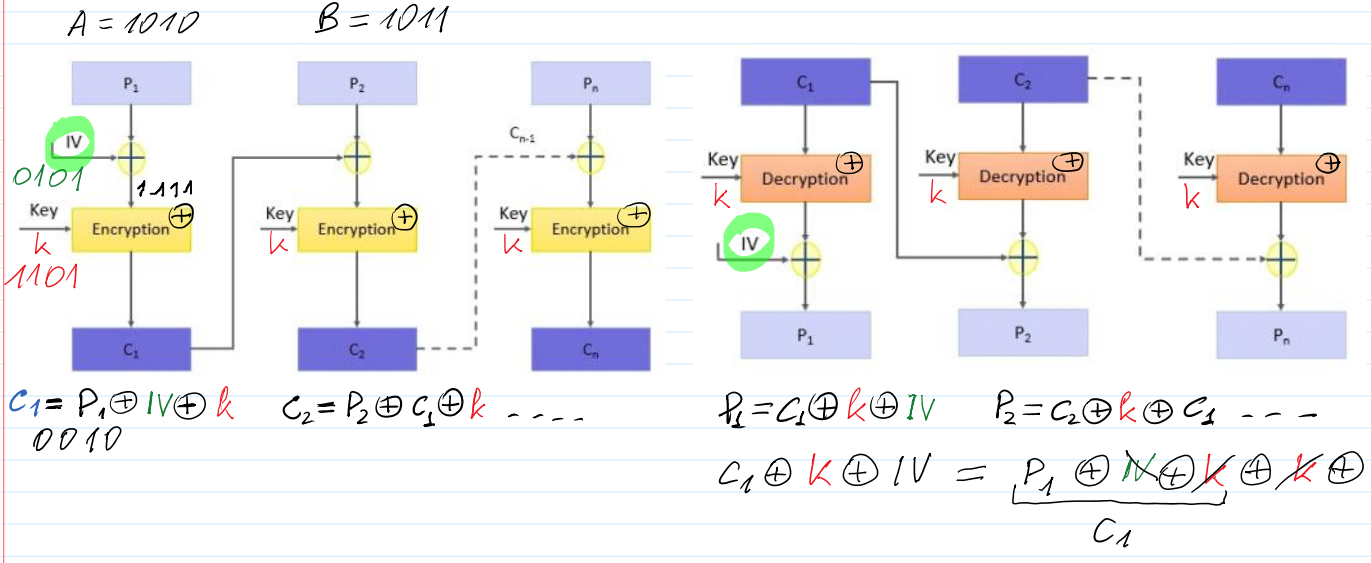

https://binaryterms.com/block-cipher.html

5. Counter Mode - CTR

It is similar to OFB but there is no feedback mechanism in counter mode. Nothing is being fed from the previous step to the next step instead it uses a sequence of number which is termed as a **counter** which is input to the encryption function along with the key. After a plain text block is encrypted the counter value increments by 1.

Steps of encryption:

Step1: The counter value is encrypted using a key |***k***|=128 bits

Step 2: The encrypted counter value is XORed with the plain text block to obtain a ciphertext block.

To encrypt the next subsequent plain text block the counter value is incremented by 1 and step 1 and 2 are repeated to obtain the corresponding ciphertext.

The process continues until all plain text block is encrypted.


Steps for decryption:

Step1: The counter value is encrypted using a key.

Note: Encryption function is used in the decryption process. The same counter values are used for decryption as used while encryption.

Step 2: The encrypted counter value is XORed with the ciphertext block to obtain a plain text block.

CTR	
Counter	
Encryption parallelizable:	Yes
Decryption parallelizable:	Yes
Random read access:	Yes

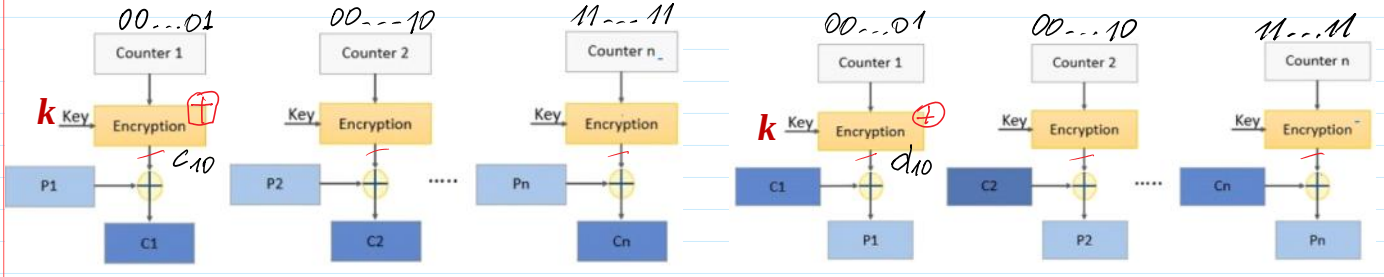

$C_{10} = CTR_1 \oplus k$

$C_1 = C_{10} \oplus P_1$

$d_{10} = CTR_1 \oplus k$

$C_1 \oplus d_{10} = C_{10} \oplus P_1 \oplus CTR_1 \oplus k = \quad (C_{10} = d_{10})$

$= CTR_1 \oplus k \oplus P_1 \oplus CTR_1 \oplus k = P_1$.

```
% AES128(in,kh32,NR,fun)
% Advanced Encryption Standard symmetric cipher with key length of 128 bits
% Encryption is performed for 1 block of length 128 bits or 16 ASCII symbols
%
% in - plaintext/ciphertext of string type: maximum 16 symbols or shorter
%
% kh32 - shared secret key in hexadecimal number of length=32 (128 bits)
% kh32 can be obtained when shared decimal key k is given using commands:
%      >> k=int64(randi(2^28))
%      k = 160966896
```

```
%      >> kh32=dec2hex(k,32)
%      kh32 = 000000000000000000000000099828F0
%
% NR - Number of Rounds (e.g. Nr = 10)
%     The smaller NR, the lower security of encryption but the speed of encryption is higher
%     The least number of NR is 1 and in this case security lack is evident
%
% fun - letter determining either encription: fun='e' or decryption: fun='d' functions
%
% Encryption example:
% >> in = 'Hello Bob';
% >> kh32 = '000000000000000000000000099828F0';
% >> NR = 10;
% >> Ch = AES128(in,kh32,NR,'e')
% ASCII_e =   ?1  ~mV                % ciphertext in ASCII format
% Ch = 0f9a2c08d191310fb27ed16d90f45686   % ciphertext in hexadecimal format
%
% Decryption example:
% >> Dh = AES128(Ch,kh32,NR,'d')
% Dh = 00000000000048656c6c6f7720426f62   % decrypted message in hex format
% D = Hello Bob                      % Decrypted message in ASCII format
%
function Out = AES128(in, key ,Nr, mode)
```

Encryption security depends of the number of rounds - NR
Test when NR=1
NR=10
And compare ciphertexts in hex format.